



Nice

Model MR5100 Reference Guide

Front Panel Features

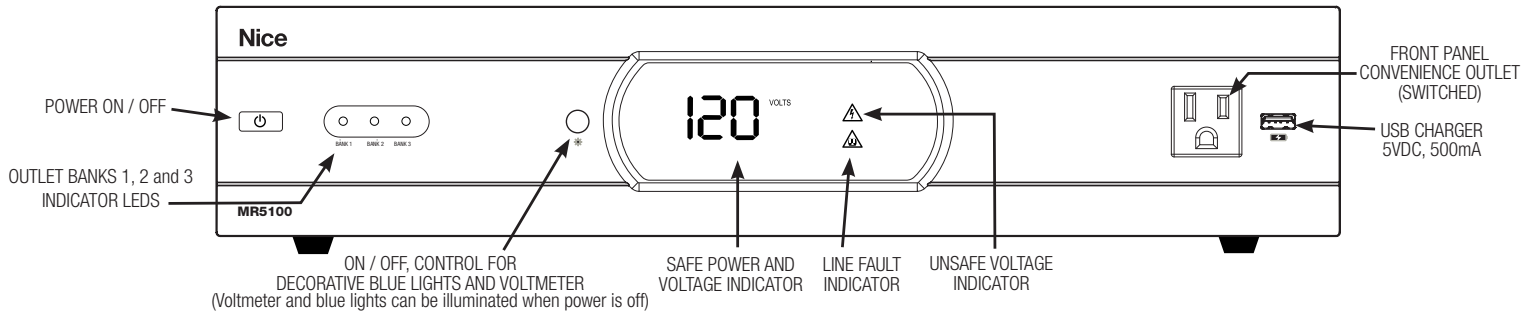

Back Panel Features

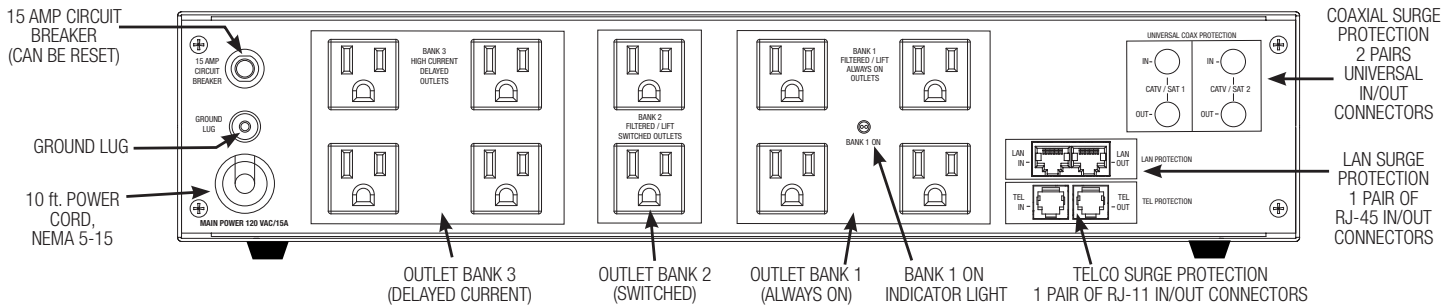

Important Safety Points

Nice surge protectors and the connected equipment must be indoors, in a dry location and in the same building. Although your Nice protector is very durable, its internal components are not isolated from the environment. Do not install any Nice product near heat emitting appliances such as a radiator or heat register. Do not install this product where excessive moisture is present; for example near a bath tub, sink, pool basement floor, fish tank, etc. It is not uncommon for a building to be improperly grounded. In order to protect your equipment, Nice products must be plugged into a properly wired and grounded 3-wire outlet. Additionally, building wiring and grounding must conform to applicable NEC (USA) or CEC (Canada) codes for the Nice protection policy to be valid. Do not use 2-blade adapters or any other "power strips" with this product. Use only Nice extension cord, or a UL / CSA recognized power cord.

To Get Started

1. With MR5100 disconnected from the wall outlet, plug the equipment to be protected into the MR5100 AC outlets.
2. Connect any LAN, TELEPHONE and COAX lines to be protected to the appropriate connectors on the MR5100.
3. Plug the MR5100 into the wall outlet and verify that the LINE FAULT INDICATOR LED is NOT lit, indicating that the wall outlet is properly wired and grounded. If it is LIT, call a licensed electrician to inspect and implement proper and safe wiring.
4. Turn on MR5100 by pressing the POWER ON button and proceed to turn on your connected equipment.

MR5100 Features and Specifications

Key Features

Exclusive Automatic Voltage Monitoring (AVM) The monitoring circuitry constantly monitors the AC line voltage for unsafe voltage conditions such as momentary spikes, prolonged over-voltages and under-voltages (brownouts). These unsafe conditions pose a very dangerous threat to all electronic equipment within the home. If the MR5100 senses an unsafe power condition, it will automatically disconnect power from your equipment to protect equipment from damage. The front panel indicator will also alert users to the power condition. Once the voltage returns to a safe level, the MR5100 will automatically reconnect the power to the outlets.

Protect or Disconnect™ Technologies
In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.

Front Panel Outlet
MR5100 features a protected and noise filtered convenience outlet located on the front panel. Perfect for temporary gaming systems, portable electronics (such as music players or smart phones), or other personal electronics.

Note to CATV Installers:

This reminder is provided to call attention to Article 820-40 of the NEC. That article provides specific guidelines for proper grounding. It specifies that the cable ground shall be connected to the grounding system of the building and as close to the point of entry as practical.

Front Panel Decorative Lights

Blue decorative lights add an attractive look at feel to your equipment rack or TV cabinet.

Antenna, Cable, Sat and LAN Signal protection
Coaxial protection circuits prevent damaging surges from entering through signal paths and have the smallest signal loss on the market - less than 0.5 db of attenuation from 0Hz to 2.2GHz. Our coaxial protection has been specifically designed to virtually eliminate signal loss. The clamping level of 75V will meet and exceed the demands of both cable and satellite voltages while minimizing exposure to damaging spikes and surges. LAN protection allows for 10/100 base-T Ethernet equipment to integrate into an audio/video system without the risk of upstream surge damage from a gateway, switch, router or other network device.

Eleven Protected and Filtered Power Outlets
(see specifications)

Ten Foot Power Cable with Straight Plug
NEMA 5-15P, fixed strain relief, unshielded, straight plug.

AC Protection

Protect or Disconnect Circuitry	Yes
Patented Power Management Circuit	Yes
Overvoltage Shutoff	140V ±3V
Undervoltage Shutoff	100V ±1V
Thermal Fusing	Yes
Line Voltage	120VAC, 50/60HZ
Initial Clamping Level	200V Peak, 141VRMS
Voltage Protection Rating (UL 1449 3rd Edition, 3,000A)	400V
Protection Modes	L-N, L-G, N-G
Maximum Current Rating	15A (1800W)
EMI/RFI Noise Filtration	Nice Level 3 Noise Filtration*
Response Time	< 1ns
Single Pulse Energy Dissipation	2025 Joules
Peak Impulse Current	52,000 A

LAN Protection

Clamping Level	62±6V @ 1 mA
Compatibility	10/100/1000bT
Wires Protected	8-Wires
ConnectorsRJ-45

TEL Protection

Fuseless/Auto-Resetting	Yes
Clamping Level	260V
Wires Protected	2 wire, 1 pair (4, 5)
ConnectorsRJ-11

Telephone Circuit

HD 1080 i/p Ready	Yes
Bidirectional	Yes
Shielded	Yes
Clamping Level	75V
Frequency Range	0MHz - 2.2 GHz
Insertion Loss	<0.5 dB
Connections	Female "F", Gold Plated

Specifications subject to change due to product upgrades and improvements.
* Go to www.niceforyou.com for detailed noise filtering information.

Español - Para la versión en español de este documento, vaya a www.niceforyou.com

Français - Pour la version espagnole de ce document, allez à www.niceforyou.com

MR5100 Limited Product Warranty and Connected Equipment Policy Information

CAUTION!

All Nice Warranties and Connected Equipment Policies are valid only in the United States and Canada.

CAUTION!

Audio/Video, computer and/or telephone system installations can be very complex systems, consisting of many interconnected components.

Due to the nature of electricity and surges, a single protector may not be able to completely protect complex installations. In those cases, a systematic approach using multiple protectors must be employed. Systematic protection requires professional design. AC power, satellite cables, CATV cables, telephone/network lines, signal lines or any other electrical conductors, entering the system that do not pass through this surge protector may invalidate the Nice Connected Equipment Protection Policy. For additional information on how to protect your system, please contact Nice before connecting your equipment to the surge protector.

CAUTION!

WARRANTY LIMITATION FOR INTERNET PURCHASERS

Nice products purchased through the Internet do not carry a valid Product Warranty or Connected Equipment Protection Policy unless purchased from an Authorized Nice Internet Dealer and the original factory serial numbers are intact (they must not have been removed, defaced or replaced in any way). Purchasing from an Authorized Nice Internet Dealer insures that the product was intended for consumer use, has passed all quality inspections and is safe. Buying through auction sites or unauthorized dealers may result in the purchase of salvaged, failed and/or products not intended for use in the US. In addition, Authorized Nice Internet dealers have demonstrated sufficient expertise to insure warranty compliant installations. For a list of Authorized Nice Internet Dealers go to www.niceforyou.com. If you have any questions regarding these requirements, please contact Nice Customer Relations.

Nice Power Conditioner Limited Product Warranty

Nice warrants to the purchaser of this Nice audio/video component style power conditioner, for a period of three (3) years from the date of purchase, that the unit shall be free of defects in design, material or workmanship, and Nice will repair or replace any defective unit. For product replacement see "NOTIFICATION" section (3).

Nice Power Conditioner Limited Connected Equipment Protection Policy

It is the policy of Nice that it will, at its election, either replace, pay to replace at fair market value, or pay to repair, up to the dollar amount specified below, equipment that is damaged by an AC power, cable, telephone, or lightning surge while connected to a properly installed Nice power conditioner. To be eligible for compensation, repair and or replacement, the power conditioner must show signs of surge damage or that it is operating outside of design specifications, relative to its surge protection capability, and under all of the circumstances failed to protect your connected equipment.

MR5100: \$5,000,000

THE CONNECTED EQUIPMENT POLICY IS SUBJECT TO THE FOLLOWING CONDITIONS AND LIMITATIONS

1. ORIGINAL OWNERSHIP REQUIREMENT:

The connected equipment policy extends to the original purchaser of the Nice product only and is non-transferable. Original purchase receipts must accompany any product return or claim for connected equipment damage.

2. PROPER INSTALLATION: Nice AC protectors must be directly plugged into a properly grounded 3-wire AC outlet. Extension cords*, non-grounded two prong adapters, or other non-Nice surge products must not be used. Building wiring and other connections to protected equipment must conform to applicable codes (NEC or CEC). No other ground wires or ground

connections may be used. All wires (including, e.g., AC power lines, telephone lines, signal/data lines, coaxial cable, antenna lead-ins) leading into the protected equipment must first pass through a single Nice protector designed for the particular application. The protector and the equipment to be protected must be indoors in a dry location, and in the same building. Nice installation instructions and diagrams must be followed

3. NOTIFICATION: You must notify Nice within ten days of any event precipitating request for product replacement or payment for connected equipment damage. A return authorization (RA) number must first be obtained from the Nice Customer Relations Department at www.niceforyou.com** before returning the protector. At this time, you must notify Nice if you believe you have a claim for damaged connected equipment. Once you obtain an RA number, please mark the number on the bottom of the unit and pack it in a shipping carton/box with enough packing material to protect it during transit. The RA number must also be clearly marked on the outside of the carton. Ship the unit. Please note that you are responsible for any and all charges related to shipping the unit to Nice. If connected equipment damage was indicated on your RA request, Nice will mail you claim kit to be completed and returned within 30 days. A connection diagram of your system will be required as part of the claim kit. Be sure to note its configuration before disconnecting your equipment.

4. DETERMINATION OF FAILURE: Nice will evaluate the protector for surge damage. The Nice protector must show signs of surge damage or must be performing outside (>10%) of design specifications relative to its surge protection capability. Opening the enclosure, tampering with, or modifying the unit in any way shall be grounds for an automatic denial your request for payment. Nice, after evaluating all information provided, will determine whether or not your request is eligible for payment. If the surge protector shows no signs of AC power or signal line surge damage and is working within design specifications, Nice will return the unit to you with a letter explaining the test results. Exceptions: If a dealer or installer replaces the protector for the customer, replacement will be

returned to the dealer installer; or if the protector is a pre-1996 model, it will be replaced; or, for a Canadian customer, the protector will be replaced. Nice reserves the right to inspect the damaged connected equipment, parts, or circuit boards. Please note that you are responsible for any and all charges related to shipping the damaged equipment to Nice. Nice also reserves the right to inspect the customer's facility. Damaged equipment deemed uneconomical to repair must remain available for inspection by Nice until the claim is finalized.

5. REQUEST PAYMENTS: Once Nice has determined that you are entitled to compensation, Nice will, at its election, either pay you the present fair market value of the damaged equipment, or pay for the cost of the repair, or send you replacement equipment, or pay the equivalence of replacement equipment.

6. OTHER INSURANCE/WARRANTIES: This coverage is secondary to any existing manufacturer's warranty, implied or expressed, or any insurance and/or service contract that may cover the loss.

7. EXCLUSIONS: THE CONNECTED EQUIPMENT PROTECTION POLICY DOES NOT APPLY TO: Service charges, installation costs, reinstallation costs; setup cost; diagnostic charges; periodic checkups; routine maintenance; loss of use of the product; costs or expenses arising out of reprogramming or loss of programming and/or data; shipping charges or fees; service calls; loss or damage occasioned by fire, theft, flood, wind, accident, abuse or misuse, and products subject to manufacturer's recall or similar event.

8. DISPUTE RESOLUTION: Any controversy or claim arising out of or relating to the Connected Equipment Protection Policy, or the alleged breach thereof, shall be settled by arbitration administered by the American Arbitration Association under its Commercial Arbitration Rules. You may file for arbitration at any AAA location in the United States upon the payment of the applicable filing fee. The arbitration will be conducted before a single arbitrator, and will be limited solely to the dispute or controversy between you and Nice. The arbitration shall be held in any mutually agreed upon location in person, by telephone, or online. Any decision

rendered in such arbitration proceedings will be final and binding on each of the parties, and judgment may be entered thereon in a court of competent jurisdiction. The arbitrator shall not award either party special, exemplary, consequential, punitive, incidental or indirect damages, or attorney's fees. The parties will share the costs of arbitration (including the arbitrator's fees, if any) in the proportion that the final award bears to the amount of the initial claim.

9. GENERAL: If you have any questions regarding the product warranty or the connected equipment protection policy, please contact the Nice Customer Relations Department at www.niceforyou.com. The Limited Product Warranty and Connected Equipment Policy herein supersedes all previous warranties and/or Connected Equipment repair/replacement policies.

THE LIMITED PRODUCT WARRANTY IS THE ONLY WARRANTY PROVIDED WITH THIS PRODUCT AND ANY OTHER IMPLIED OR EXPRESSED WARRANTIES ARE NON-EXISTENT.

This warranty may not be modified except in writing, signed by an officer of Nice North America.

* The use of a Nice extension cord or equivalent (UL or CSA listed, minimum 14AWG, 3-wire grounded) will not invalidate the warranty.

** Forms are available on the Nice web site for requesting RAs and opening a claim for connected equipment damage.

Nice

Niceforyou.com

©2023 Nice North America LLC. All rights reserved.

Technical Support:

800-421-1587

Technical Support Hours:

M – F, 6:00 a.m. – 4:00 p.m. PST

Nice North America

c/o Customer Service
5919 Sea Otter Place, Suite 100
Carlsbad, CA 92010