


# Panamax



Surge  
**Protect**



Noise  
**Filter**



Connected  
Equipment  
**Longevity**



Lifetime  
**Warranty**

Applications for:

- Computers
- Printers
- Copiers
- Appliances
- TV's



# MD2

## Multi-Use AC Surge **Protection**

- EMI/RFI Filtration Circuitry for Clean, Unimpeded Power.
- Protect or Disconnect™ Circuitry
- Two Diagnostic Lights (LED) Power On/Protection OK and Line Fault
- Thin Profile - Only 1.5 inches deep.
- Two AC Outlets
- Removable, Paintable Cover




Versatile  
Outlet  
Orientation



Front cover can easily be removed & painted to match any wall color.

### TYPICAL INSTALLATION

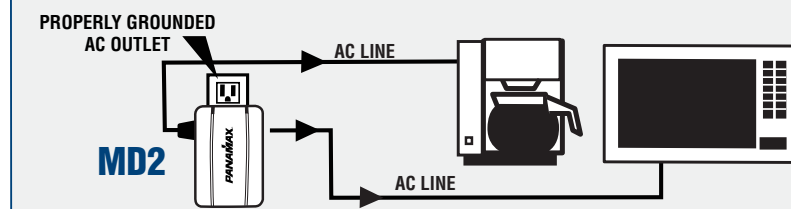

### SPECIFICATIONS

#### AC POWER

Protect or Disconnect™ Circuitry	_____ Yes	Maximum Current Rating	_____ 15A (1800W)
Line Voltage	_____ 120VAC, 50/60Hz	EMI/RFI Noise Filtration	_____ 50dB (100kHz - 1 MHz)
Initial Clamping Level	_____ 200V	Response Time	_____ < 1 nanosecond
Voltage Protection Rating (UL1449 3rd Edition, 3,000A)	_____ L-N 400V, L-G 500V, N-G 400 V	Single Pulse Energy Dissipation	_____ 1350 Joules
Nominal Discharge Current	_____ 3,000A	Peak Impulse Current	_____ 60,000 A
Protection Modes	_____ L-N, L-G, N-G	Catastrophic Surge Circuit	_____ Yes
		Thermal Fusing	_____ Yes

Design and specifications subject to change without notice due to product improvement.

### MEASUREMENTS, WEIGHTS, QTYS & UPC FOR ORDERING & SHIPPING

	Measurements	Weights	Qty.	UPC
Product:	1.625" x 3.25" x 5.25"	.65 lb.	1	-
Individual Box:	3" x 4.75" x 6.25"	.75 lb.	1	050616008754
Inner Pack:	6.125" x 15" x 6.375"	5 lbs.	6	30050616008755
Master Pack:	15" x 10" x 13"	21 lbs.	24	50050616008759

800-472-5555 • www.panamax.com

**PANAMAX**