



## Signature<sup>®</sup>

SERIES

### ***HIGH PERFORMANCE***

## 3.5" In-Ceiling Speaker

The PAS-C355 high performance Small Aperture In-Ceiling Speaker delivers dynamic and impactful sound in a compact form factor. Leveraging advanced technology and materials, its high-excursion glass fiber woofer, proportionately massive silk dome tweeter, custom crossover design, and versatile installation options make it a top choice for those seeking premium performance without compromising on aesthetics.

Appealing to the most fastidious designer's needs, with both round and square grilles included and flush mount kits available.



Designed and engineered in the USA, in tandem with the PAS-C854-SUB Small Aperture In-Ceiling Subwoofer and PAS-A4100 Amplifier to deliver a complete system, optimized for aesthetics, performance, and flexibility.

# PAS-C355 Small Aperture Speaker

## Features

- **3.5" Glass Fiber Woofer**  
Stiff, light, and incredibly strong—this compact woofer is transparent with low distortion
- **.75" Silk Dome Tweeter**  
Proportionately massive to deliver dynamic detail at a lower crossover point
- **Custom Component Two-way Crossover**  
Delivering smooth, rich vocals with exceptional clarity and sound quality to any room in the home
- **4.75" Cut-out Size**  
Use a standard hole saw for a quick retrofit install
- **Optional Flush Mount Mudbank**  
Grille sits flush with the surface for a near invisible aesthetic. *(sold separately)*

Includes two low-profile, paintable grilles for a round or square finish to match custom recessed lighting, fixtures and ceiling color.

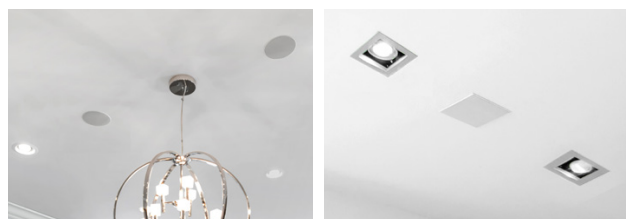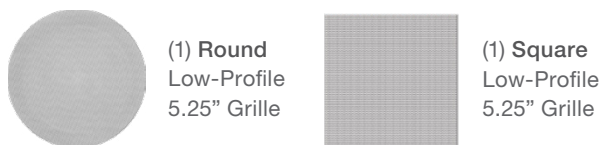

Includes cut-out template for both grilles.  
*Optional Pre-Construction Bracket available. (sold separately)*

### Accessories:

- SC-IC3-PCB | Pre-Construction Bracket
- SC-IC3-FLUSH-ROUND | Round Flush Mount Mudbank
- SC-IC3-FLUSH-SQUARE | Square Flush Mount Mudbank



## Specifications

Woofer Size	3.5"
Woofer Configuration	Fixed
Woofer Material	Glass Fiber
Tweeter Size	.75"
Tweeter Configuration	Fixed
Tweeter Material	Silk Dome
Power Handling (Watts)	30 - Minimum / 70 - Maximum
Frequency Range	70Hz-20k
Impedance	8 Ohms
Sensitivity	80 db
Weight	0.7 lb
Hole Cutout Dimensions	4.75"
Depth Behind Wall	3.5"
Finished Grille Dimensions	5.25"
Shipping Dimensions	6" x 8" x 8" (155 x 200 x 200 mm)
Shipping Weight	2.2 lb

**PROFICIENT**  
AUDIO a Nice brand

[proficientaudio.com](http://proficientaudio.com)

**Nice**